


Abaco

Glazed, Rectified Porcelain Tile

Innovative, versatile and extremely functional, the Abaco collection takes the nuances of concrete to their highest expression, improving them with the durability of porcelain tile.

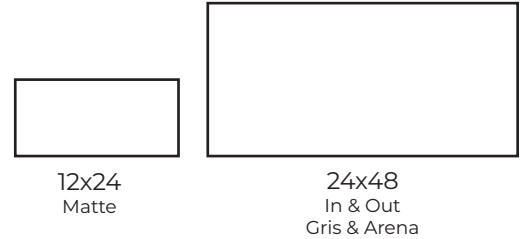

Stocked Sizes	Price/sf	Price/pc	Thickness	# of Faces
12x24	\$8.77	\$16.99	7mm	20 faces
24x48	\$10.85	\$84.09	7mm	10 faces

Technical Specifications

	ASTM Test	ISO Test	Specifications
Water Absorption	C373	ISO-10545/3	≤0.5%
Break Strength	C648	ISO-10545/4	≥350
Scratch Hardness	MOH's Scale	EN-101	7
Chemical Resistance	C650	ISO-10545/13	Unaffected
Frost Resistance	C1026	ISO-10545/12	Resistant
Stain Resistance	C1378	ISO-10545/14	4-5
Fire Rating	E84	ISO-13501/1	Non-Combustible
PEI Abrasion Resistance of Glazed Tiles	C1027	ISO-10545/7	PEI IV
Minimum Bond Strength (PSI)	C482	-	165
Dynamic Coefficient of Friction (DCOF)	A137.1	-	≥0.42 (Matte) ≥0.5 (In & Out)
Slip Rating (Ramp Test)	DIN 51130		R11 (In & Out)
Shade and Texture Rating	CTDA "V"	-	V3
Facial Dimensions	C499	ISO-10545/2	Pass
Range of Thickness	C499	ISO-10545/2	Pass
Warpage/Surface Flatness	C485	ISO-10545/2	Pass
Wedging/Rectangularity	C502	ISO-10545/2	Pass

Porcelain and stone products contain very low levels of silica.
However, fabrication must comply with OSHA standards and regulations to ensure proper safety practices.

Recommended Applications

Stocked Sizes	Residential Interior	Residential Exterior	Commercial Interior	Commercial Exterior	Shower	Steam	Pool
12x24 Matte	W/F	W	W/F	W	W/F	W/F	
24x48 In & Out	W/F	W/F	W/F	W/F	W/F	W/F	

Recommended applications do not include consideration of any technical installation requirements or safety standards for slopes and pool decks.
All tile products and setting materials should be selected and installed in compliance with manufacturers specifications and applicable use standards.
* W – Wall | ** F – Floor